

TECHNICAL DATA SHEET

AMLTAL RGB IP44 / Aga-Led® Type RGB

VERSION - 10.11.2016


STANDARD LUMINAIRE

Reference	AMLTAL
Protection Class	IP44
Lighting Source	Aga-Led® Type RGB
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	120 x 60mm
Standard Length	610 - 910 - 1210 - 1510mm
Length on measure	on request up to 2965
Nb Lighting Unit	17 LED/m
Voltage	24V
Power	40.8W/m
Connecting Cable	1m standard cable 4x0.75mm ²
Fixation	FIX
End Caps	ARL + EFA

APPLICATION: Miroirs, walls



AMLSAL RGB / AGA-LED® TYPE RGB - Festoon

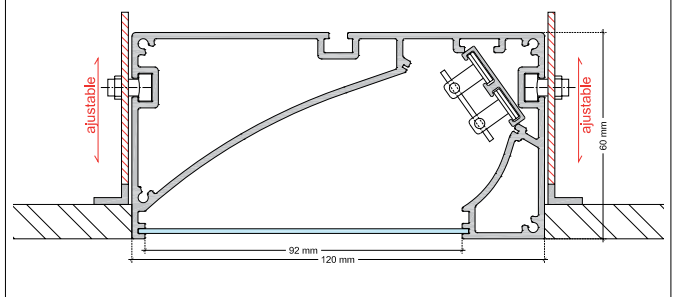

FINISH


Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect Plywood

Glass Finishing

Standard	VER: Opaline Glass
On request	VERC: Clear Glass

FIXATION : FIX



ON REQUEST

Connecting Plug	AMS / AF
Dimming Option	Dali, KNX Ask technical departement for more information

ON REQUEST : Connecting plug AMS/AF



LIGHTING SOURCE

Lighting Source	Aga-Led® Type RGB
Ref	09LS05B G2
Voltage	24V
Current	Red: 20mA-Green: 40mA-Blue: 40mA
Power	2.4W
Beam Angle	120°
Light Output - mcd	Red: 750 mcd Green: 2100 mcd Blue: 450 mcd
Lifetime	50'000h
Working T°	-20°C to +45°C
Environmental protection	Modified acrylate resin

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

