

## TECHNICAL DATA SHEET

### LED Down Light / EN-DLG series-02 / IP44

VERSION - 28.07.2017

#### STANDARD LUMINAIRE

Reference	EN-DLG015-02	EN-DLG020-02	EN-DLG027-02
Power	15 W	20 W	27 W
Current	350 mA	350 mA	700 mA
Protection Class	IP44	IP44	IP44

Dimensions	ø147 x Ht.64mm
Cut-Out	ø125mm
Voltage	AC220-240V, 50-60Hz
Led Type	Citizen Cob Led
CRI	80+
Beam Angle	10°, 40°
Dimmable	Yes optionnal
Working T°	-20°C ~ +45°C
Warranty	5 years

#### APPLICATION:

- perfectly suitable for hotel and villa lighting
- recessed bathroom lighting



#### COLOR TEMPERATURE & LUMINOUS FLUX

##### EN-DLG015-02

<b>2'700K</b>	<b>3'000K</b>	<b>4'000K</b>
1050 lm ±5%	1100 lm ±5%	1130 lm ±5%


##### EN-DLG020-02

<b>2'700K</b>	<b>3'000K</b>	<b>4'000K</b>
1580 lm ±5%	1600 lm ±5%	1650 lm ±5%

##### EN-DLG027-02

<b>2'700K</b>	<b>3'000K</b>	<b>4'000K</b>
1944 lm ±5%	2160 lm ±5%	2295 lm ±5%

#### EN-DLG015-02 / EN-DLG020-02 / EN-DLG027-02

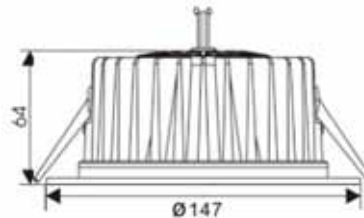

#### FINISH

Standard	Black + White
Heat Sink	Fin-Style 6063 aluminium

#### ON REQUEST

Beam Angle	10°, 40°
Dimming Option	Triac, <i>Ask technical departement for more information</i>

#### CERTIFICAT

