

TECHNICAL DATA SHEET

LL3TS IP67 / Luminaire Sauna T° Resistance 200°C / Xenon Bulb 20'000h VERSION - 03.05.2018

STANDARD LUMINAIRE

Reference	LL3TS
Protection Class	IP67 Tube High Temperature 200°C
Lighting Source	Xenon - 3W/5W max.
Connector	Rigid Loop on B'Light conductor 16mm ²
Dimensions	53x55mm
Standard Length	170mm - 500mm - 995mm - 1490mm - 2040mm
Nb Lighting Unit	16 bulbs/m
Voltage	24V
Power	With 3W: 48W/m With 5W: 80W/m
Connecting Cable	One Side: 1m Cable Silicone 180° - 2x2.5mm ² <i>On request: Cable length on measure</i>
Fixation	RFS - 2 per luminaire

FINISH

Profil - Standard	Natural Anodised Aluminium
<i>On request</i>	<i>Thermo-Enameling</i> <i>Powder Coating RAL</i> <i>Color Anodising</i>
Tube 200°C	Transparent Elastomer Silicone - High dielectric rigidity - Good resistance to chemical product - Excellent resistance to ozone and aging - Temperature resistance: -60°C ~ +200°C

ON REQUEST

Connecting Cable	Two Sides: 1m Cable Silicone 180° - 2x2.5mm ² <i>On request: Cable length on measure</i>
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Xenon Long Life
Glass	Clear or Frosted
Power	3W or 5W
Voltage	24V
Beam Angle	360°
Lifetime	20'000h

Color Temperature & Luminous Flux / Unit

Power	3W	5W
CCT	2300K	2400K
Luminous Flux/Unit	12.6 lm	40 lm


CERTIFICAT



APPLICATION: SAUNA



LL3TS / Xenon **3W/5W max.**

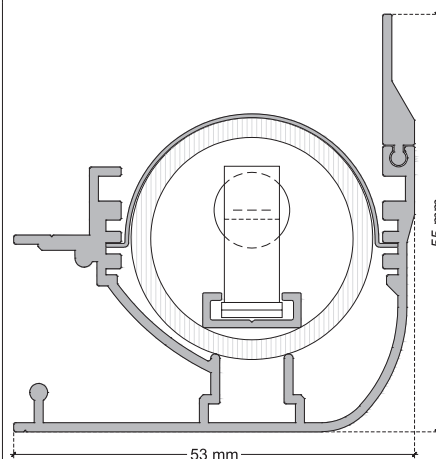

Fixation RFS

