

TECHNICAL DATA SHEET

Hanging Rod with Light / LPX-AC Plywood Finish IP20 / Xenon

VERSION - 03.08.2016


STANDARD LUMINAIRE

Reference	LPX-AC Wood Finish	
Protection Class	IP20	
Lighting Source	Xenon	
Connector	Rigid Loop on B'Light conductor 16mm ²	
Dimensions	ø34mm	
Standard Length	330 - 1000 - 1670 - 2000mm	
Length on measure	on request up to 3000mm	
Nb Lighting Unit	17 bulbs/m	
Voltage	24V	
Power	3W	5W
	51 W/m	85 W/m
Connecting Cable	1m standard cable 2x2.5mm ²	
Wall Fixation	FT1-W	
Grid	GRPR	

APPLICATION: Wardrobes Lighting



LPX-AC Wood Finish / Xenon - Rigid Loop / Grid :GRPR

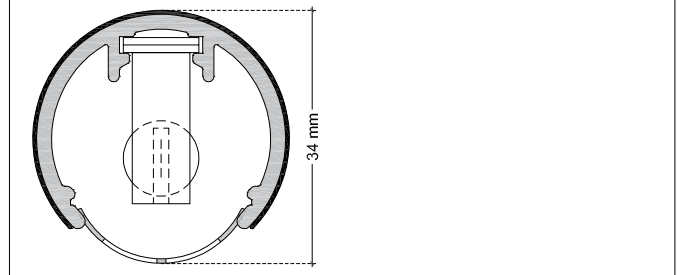

FINISH

Color Finishing Profil

Standard Plywood

Glass Finishing

Standard VFC: Clear Glass

On request VFO: Opaline Glass


Wall Fixation & Median Support Finishing

Standard Natural Anodised Aluminium

On request
Thermo-Enameling
Powder Coating RAL
Color Anodising
Polished Aluminium Chrome Aspect
Polished Aluminium Old Gold Aspect

WALL FIXATION : FT1-W

Not available in plywood

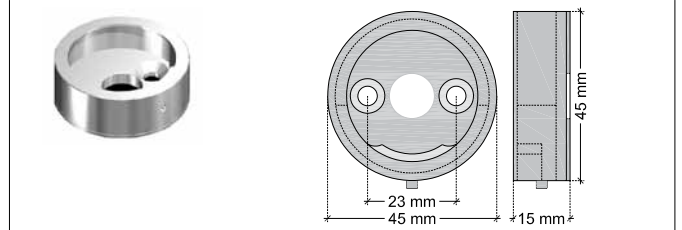

ON REQUEST

Fixation	FC-W: Median Support
Reflector	RIP
Connection	IDP: Door Switch
Dimming Option	Phase 220V, Dali, KNX Ask technical departement for more information


LIGHTING SOURCE

Lighting Source	Xenon Long Life	
Glass	Clear or Frosted	
Power	3W	5W
Voltage	24V	24V
Beam Angle	360°	360°
Color Temperature	2300K	2400K
Light Output lm/unit	12.6lm	40lm
Lifetime	20'000h	20'000h

MEDIAN SUPPORT : FC-W

Every 900mm for a safe installation

Not available in plywood

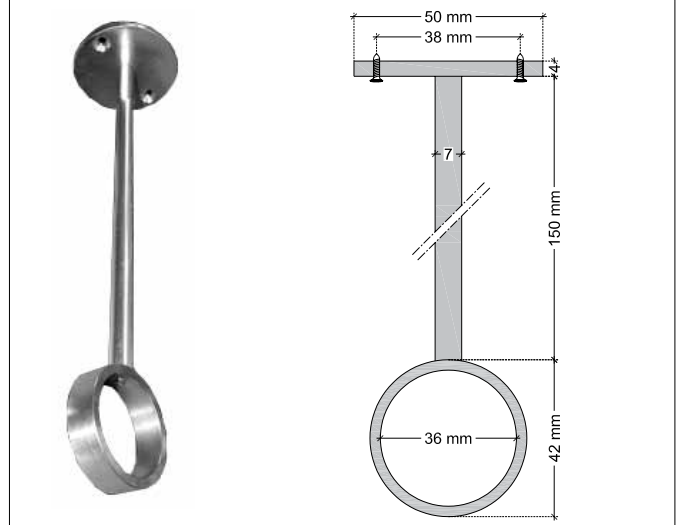

CERTIFICAT



AGABEKOV

TECHNICAL DATA SHEET

Hanging Rod with Light / INSTALLATION

VERSION - 03.08.2016

