

TECHNICAL DATA SHEET

LU3RSAL IP20 / ARLS Orientable Spot

VERSION - 05.01.2017

STANDARD LUMINAIRE


Reference	LU3RSAL / ARLS
Protection Class	IP20
Lighting Source	ARLS Spot with Aga-Led® BUR
Connector	Festoon on B'Light conductor 16mm ²
Dimensions	52 x 52mm
Length on measure	69mm to 3000mm
Nb Lighting Unit	9 ARLS/m (Max:18 ARLS/m)
Voltage	24V (12V: Dimmable)
Power	16.2 W/m (Max: 32.4W/m)
Connecting Cable	1m standard cable 2x1.5mm ²
Cover	Metal: CFP1
End Caps	EPA

APPLICATION: museums, showcases, private collections

Don't hesitate to contact us for different configurations.



LU3RSAL / ARLS Spot with AGA-LED® BUR

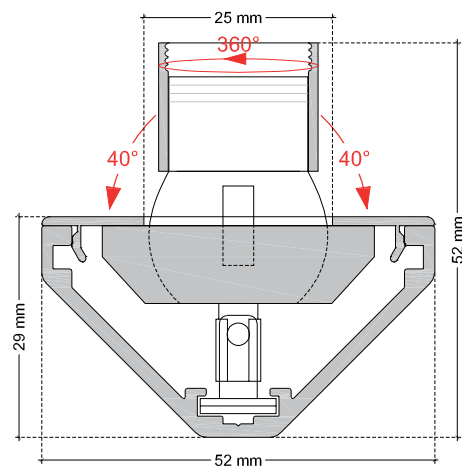

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect

ON REQUEST

Connecting Plug	AMS / AF
Dimmable	12V Only : 1-10V, Dali, KNX Ask technical departement for more information


LIGHTING SOURCE

Lighting Source **Aga-Led® BUR**



Ref	BUR_14
Voltage	24V (12V Dimmable)
Power	1.8W
Beam Angle	14°
CRI	80
Light Output	lm/Unit
	2200K 67~74 lm
	4000K 107~114 lm
Lifetime	50'000h
Working T°	-20°C ~ +40°C

LU3RSAL Cover : CFP1

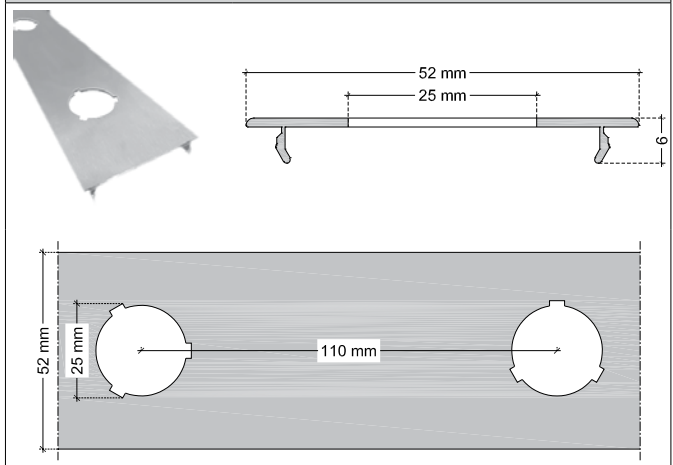

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@agabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.agabekov.com

