

## TECHNICAL DATA SHEET

### LU4TAL IP68 / Aga-Led® Type B


VERSION - 16.05.2017

#### STANDARD LUMINAIRE

Reference	LU4TAL68
Protection Class	IP68 - 1meter
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>
Dimensions	ø35mm
Lenght standard	135 - 520 - 1015 - 1510 - 2005 - 2665 - 2995mm
Lenght on measure	on request up to 2995mm
Nb Lighting Source	17 LED/m
Voltage	24V
Power	With B3: 16.32W/m With B6: 20.4 W/m
Connecting Cable	One Side: 1m cable Silicone 180° 2x1.5mm <sup>2</sup>
End Caps	RECS



#### LU4TAL68 / AGA-LED® TYPE B - Rigid Loop

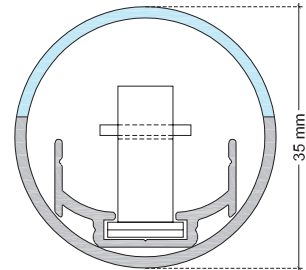

#### FINISH


##### Color Finishing Profil

Standard Polycarbonate  
*Not suitable for swimming-pool or chlorine environment*

#### ON REQUEST

Fixation	FL (Width:+7mm - Ht:+10mm)
Connecting Cable	Two sides: in and out cables
Connecting Plug	AMS / AF or AMS-E / AF-E
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>



#### ON REQUEST: LU4T68 Fixation

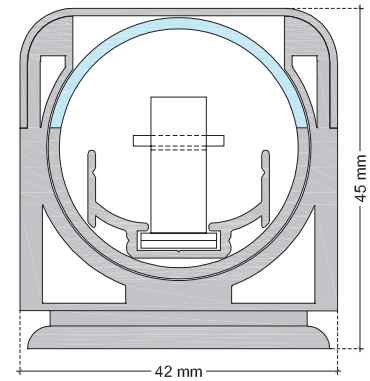

#### LIGHTING SOURCE

Lighting Source **Aga-Led® Type B - Generation 2**

Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	

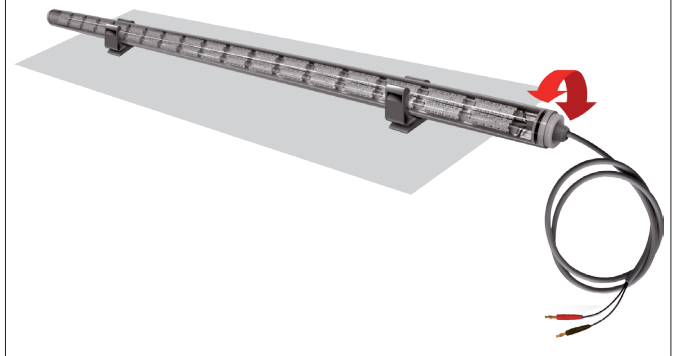

Environmental protection Modified acrylate resin

#### Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
<b>Aga-Led® B3-G2</b>	- -	97 lm	137lm	137lm	137lm
<b>Aga-Led® B6-G2</b>	129 lm	140 lm	166 lm	166 lm	166 lm

#### ON REQUEST: Connecting Plug

AF/AMS



AF-E/AMS-E (IP68)



#### CERTIFICAT

