

TECHNICAL DATA SHEET


Ceiling & Wall Linear Lighting / LT2AL / Aga-Led® Type B

VERSION - 02.10.2017

STANDARD LUMINAIRE

Reference	LT2AL
Protection Class	IP20
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm ²
Size - mm	ø33 x 233mm
Length on measure	330mm to 2990mm
Nb Lighting Source	18 LED/m
Voltage	24V
Power	With B3: 17.28 W/m With B6: 21.6 W/m
Dimmable	Yes
Cover	VFO: Opaline Glass
End Caps	EPR190: Aluminium
Fixture	Standard Height: 20cm - Number to be defined according to luminaire length

APPLICATION : WALL, CEILING OR FLOOR

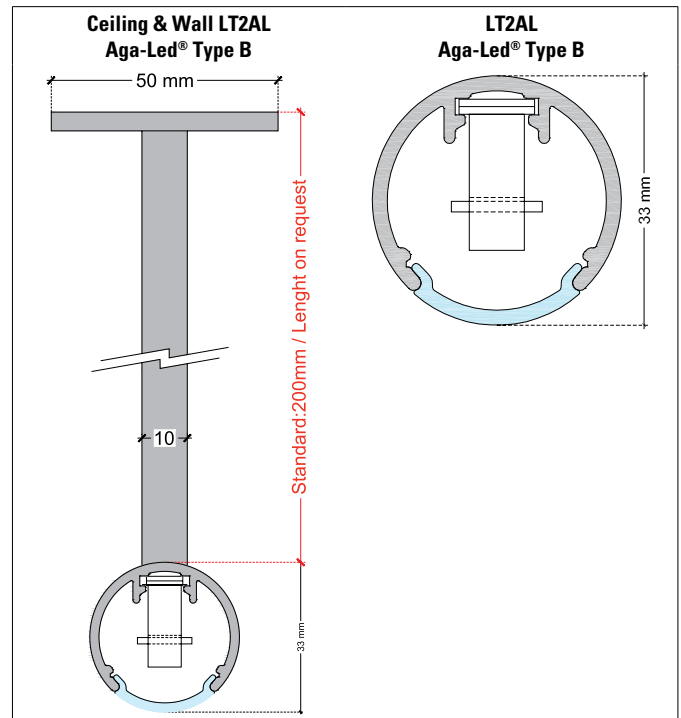

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-enameling Power Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect

ON REQUEST

Fixture	Number to be defined - Height on measure
Cover	VFC: Clear Glass
End Caps	EPR: Ryton R-4 Black
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2	
Ref	B3	B6
Power	0.96W	1.2W
Voltage	24V	24V
Beam Angle	120°	120°
CRI	80	80
Lifetime	50'000h	
Working T°	-20°C to +45°C	
Environmental protection	Modified acrylate resin	

Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	- -	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

LT2 END CAPS

Standard: EPR190
Aluminium



On Request: EPR
Ryton R-4 Black



CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

